

02/21/00  
jc585 U.S. PTO

2-23-00

Express Mail mailing label number 2/21/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 39 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

PATRICIA LESHNOCK

(Typed or printed name of person mailing paper or fee) PTO/SB/05 (4/98)  
Signature of Patent Agent or Attorney (if applicable) OMB 0651-0032  
Signature and Trademark Office of US DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box → ☒

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	RDM98002
	First Inventor or Application Identifier	W.C. Yang et al
	Title	IMPROVED FLUIDIZED BED REACTOR DESIGN
	Express Mail Label No.	

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages 11] (preferred arrangement set forth below) <ul style="list-style-type: none"><li>- Descriptive title of the Invention</li><li>- Cross References to Related Applications</li><li>- Statement Regarding Fed sponsored R &amp; D</li><li>- Reference to Microfiche Appendix</li><li>- Background of the Invention</li><li>- Brief Summary of the Invention</li><li>- Brief Description of the Drawings (if filed)</li><li>- Detailed Description</li><li>- Claim(s)</li><li>- Abstract of the Disclosure</li></ul>	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Computer Readable Copy</li><li>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</li><li>c. <input type="checkbox"/> Statement verifying identity of above copies</li></ul>	
3. <input type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 1]	<b>ACCOMPANYING APPLICATION PARTS</b> <ul style="list-style-type: none"><li>7. <input type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</li><li>8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Attorney (when there is an assignee) <input type="checkbox"/> Power of Attorney</li><li>9. <input type="checkbox"/> English Translation Document (if applicable)</li><li>10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</li><li>11. <input type="checkbox"/> Preliminary Amendment</li><li>12. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</li><li>13. <input type="checkbox"/> * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)</li><li>14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</li><li>15. <input type="checkbox"/> Other: _____</li></ul>	
4. Oath or Declaration [Total Pages 12] <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Newly executed (original or copy)</li><li>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none"><li>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</li></ul></li></ul>		
<b>* NOTE FOR ITEMS 1 &amp; 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</b>		
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ Prior application information. Examiner: _____ Group / Art Unit: _____ <b>For CONTINUATION or DIVISIONAL APPS only:</b> The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.		

<b>17. CORRESPONDENCE ADDRESS</b>	
<input type="checkbox"/> Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here)	or <input type="checkbox"/> Correspondence address below
Name	Westinghouse Electric Company LLC
Address	Law Dept - IPS P.O. Box 355
City	Pittsburgh
State	PA
Zip Code	15230-0355
Country	USA
Telephone	412 374-2282
Fax	412 374-3832

Name (Print/Type)	Joseph C. Spadacene	Registration No. (Attorney/Agent)	33,037
Signature	Joseph C. Spadacene	Date	02-18-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

jc584 U.S. PTO  
09/507605  
02/21/00

## IMPROVED FLUIDIZED BED REACTOR DESIGN

### BACKGROUND OF THE INVENTION

5

#### Field of the Invention

This invention pertains in general to fluidized bed reactors and more particularly to fluidized bed reactors that can operate continuously even with a heavy residue yield.

10

#### Background Information

In the production of metals such as zirconium, hafnium and titanium by the Kroll reduction process, zircon and rutile sands are first chlorinated in the presence of carbon to produce gaseous zirconium, hafnium, titanium and silicon tetrachlorides, which metals are then reduced with, *e.g.*, magnesium. The  
15 sands are typically chlorinated in the presence of carbon at temperatures greater than approximately 800°C in fluidized bed reactors. Non-volatile compounds, and particularly calcium, yttrium, and sodium salts in the zircon and rutile sands, eventually build up in the chlorinators and create "sticky" bed conditions which inhibit fluidization. Thus, the residues in the chlorinators must be periodically  
20 removed. Existing production chlorinators operate in a semi-continuous mode where the temperature, pressure and material feed rate are maintained constant while the residual impurities from the feeds are left to accumulate in the fluidized bed reactors. The residue contains impurities, such as  $\text{CaCl}_2$  and  $\text{YCl}_3$ , which are in molten states at reactor operating conditions and, if left to accumulate in the  
25 bed, will freeze up the bed and eventually require reactor shutdown. During production, this occurs every two to four weeks. Each time about 3,000 pounds of residue, typically containing more than 95% coke, is pulled from the bed. This material is required to be disposed of as radioactive waste because of uranium and thorium which also occur in the ore. This operating mode not only hampers the  
30 productivity but also increases the waste of raw material and the amount of residue required to be disposed as radioactive material. In order to permit these

chlorinators to operate in a truly continuous mode and avoid bed operational problems, the residue needs to be removed from the bed continuously. This is particularly difficult in current fluidized bed designs that employ an array of rocks, below the bed to diffuse and evenly distribute the gas that suspends and entrains the reactants. In chlorinators silica rocks are chosen as the diffuser because of the corrosive nature of the chlorine gas. On the other hand, the bed of rocks forms a trap for the collection of the sticky residue which readily clogs the flow channels that are intended to distribute and diffuse the chlorine gas.

Accordingly, a new fluidized bed reactor design is desired with an improved gas distribution scheme that can suspend, entrain, and mix the reactants without forming an impediment to the collection and removal of process residue. Furthermore, such a design is desired that will facilitate the continual removal of the process residue.

#### SUMMARY OF THE INVENTION

These and other objects are achieved by this invention, employing an open and unrestricted fluidized bed within the reactor housing without any impediments to the collection and removal of the process residue. A central gas inlet is positioned proximate the bottom of the reaction zone of the fluidized bed reactor housing, for directing gas upwardly through the housing to maintain the raw materials in suspension. A plurality of peripheral gas jets are positioned at at least two elevations along the reactor housing, circumferentially around the housing at each of those elevations, that introduce gas at a defined angle to promote mixing of the entrained materials in suspension. In this way, the reactants are mixed in suspension without positioning a diffuser below the reaction zone. The bottom of the housing is funneled to a collection port to guide the residue under the force of gravity to an exit where the residue can be continuously extracted.

In a preferred embodiment, a gas sparger surrounds an upper portion of the collection zone and introduces the fluidizing gas to direct agglomerates below a predetermined weight back into the reaction zone to increase the efficiency of the process and minimize the residue. In this preferred  
5 embodiment, approximately 30% of the fluidizing gas is directed through the central gas stream, 5% through the sparger and 65% through the peripheral gas jets. Individual control of the peripheral gas jets provides operational flexibility.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10 The invention as set forth in the claims will become more apparent by reading the following detailed description in conjunction with the accompanying drawing which shows a schematic view of the fluidized bed reactor of this invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 This invention provides an improved fluidized bed chemical reactor which enables continuous off-flow of the desired end product of the reaction and continuous or batch on-line discharge of a residue byproduct of the process in a manner that enables the reactor to operate continuously without clogging the  
20 fluidized bed. While the preferred embodiment is illustrated in an application to a chlorinator, it should be appreciated that the fluidized bed reactor of this invention can be used to facilitate other chemical reactions, such as coal gasification or combustion processes.

25 As previously mentioned, the carbochlorination of zircon sand ( $\text{ZrSiO}_4$ ) is the first step of a lengthy and complex series of chemical processing steps to produce high purity zirconium metal. The carbochlorination, or crude chlorination, is carried out in a fluidized bed operated at  $1000^\circ\text{C}$  using coke and chlorine. Operation of prior art chlorinators in this application have essentially been semi-continuous. Periodically, the impurities from the ore are accumulated in

the fluidized bed and are disposed of as a radioactive waste. The accumulation of impurities in the bed clogs the bed and hampers the operation and lowers the efficiency of the reactor, and increases the disposal costs of the radioactive residue. In addition, to remove the residue the reactor has to be taken off-line. It is an  
5 object of this invention to convert this semi-continuous process into a continuous one that enables on-line removal of impurities as agglomerates.

The residue of the process of the chlorination of zirconium ore contains impurities, such as  $\text{CaCl}_2$  and  $\text{YCl}_3$ , which are in molten states at the reactor operating conditions and, if left to accumulate in the bed, will freeze up the  
10 bed and eventually require reactor shutdown. The bed is typically supported by an array of rocks which are used to diffuse the chlorine gas which is employed to suspend, entrain and mix the combination of coke and zirconium ore, as it reacts with the suspended materials.

One preferred embodiment to this invention is shown in Figure 1  
15 which shows a schematic view of the improved fluidized bed reactor of this invention. The major portion of the reactor 10 is contained within a cylindrical housing 12 that has an upper opening 11 through which the raw ingredients are fed and the final product is discharged. Alternately, the raw ingredients can be fed through the central tube 22. The reactor bed is defined by a conical diffuser plate  
20 16 that contains the reactants sand and coke 14. The bed terminates at its lower end in a cylindrical discharge tube 18 which includes a lower slanted wall 20 that funnels the residue to an outlet 32 at the lower end of the discharge tube 18. The discharge of the residue is facilitated by a screw or rotary feeder 34. Preferably the discharge can be accomplished continuously or it can be accomplished on-line  
25 as a batch process.

As previously mentioned, the bed is operated at approximately  $1000^\circ\text{C}$  and is heated by an induction heating system schematically shown by reference character 17. The conical diffuser 16 is preferably constructed out of graphite which facilitates the induction heating process and can withstand the

caustic nature of the chlorine gas. The remaining portions of the system interfacing with chlorine can be constructed out of stainless steel.

Chlorine is introduced into the fluidized bed reactor of this invention in three different ways. First, approximately 30% of the chlorine is introduced through a primary inlet tube 22 which is centrally disposed along the axis of the reactor extending from below the discharge conduit to the lower portion of the reactor bed. Secondly, approximately 5% of the chlorine is introduced through a sparger 30 which encircles the greater portion of the circumference of an upper portion of the residue discharge conduit or collection tube 18 below the housing 12. The sparger 30 introduces the chlorine at a horizontal or preferably downward angle, e.g.,  $45^\circ$ , to the horizontal to prevent particle sifting into the sparger. The downwardly directed gas from the sparger turns in the discharge tube in an upwardly direction towards the bed. The pressure drop through the sparger has to be at least thirty percent of the pressure drop through the whole bed; that is the differential pressures measured between the bottom and top of the bed. The flow rate through the sparger is designed to provide a conducive fluidizing condition to allow segregation and passage of larger agglomerates while forcing the bed particles and finer agglomerates back into the reaction region to minimize the overall residue. The presence of the sparger 30 creates a separate fluidized bed in the discharge tube 18. Operation of the discharge tube 18 at a fluidizing velocity 1.2 to 1.5 times the minimum fluidization velocity of the larger agglomerates to be separated will allow segregation and passage of the larger agglomerates for withdrawal. This is a well-known principle in fluidized bed operation.

The lower portion of the housing 12 forms a plenum 28 which connects through an orifice plate 29 to gas conduits 26 which communicate with the gas orifices 24 within a distribution plate 16 at at least two spaced elevations and preferably three spaced elevations as shown in this embodiment. Though only shown on one side, for purposes of illustration, the orifices at each of the three elevations are spaced circumferentially around the distribution plate 16 and

preferably the jets at each of the elevations are not aligned. Approximately 65% of the chlorine is distributed through the orifices 24. In this embodiment there are four orifices positioned equidistantly around the lower elevation of the distribution plate and eight orifices equidistantly distributed around the distribution plate at each of the other two elevations. Preferably, the orifice 24 direct the chlorine gas at a slight angle downward to the horizontal, e.g.,  $10^\circ$ , to prevent sifting of the powder into the orifices. The orifices are sized and the gas flow from the orifices are designed to allow the orifice jets to penetrate to the middle of the reactor 12. The pressure drop through the orifices are at least 30% of that across the entire bed. Those orifice jets entrain powder and gas continuously and eventually degenerate into bubbles and promote intensive gas and solids mixing and contacting. This design is particularly effective for cohesive powders which cannot be fluidized conventionally. Individual control of each of the orifices 24, as figuratively represented by the controller 27, to adjust flow, provides exceptional operational flexibility. Preferably, all the surfaces of the reactor that contact the gas are constructed from materials such as graphite as previously mentioned or stainless steel, that can withstand the corrosive characteristics of chlorine. Though the embodiment shown in Figure 1 identifies the number of orifices and the number of jet elevations, the design will be different depending on the size of the chlorinator. In all cases, however, the design will follow the fluidization and gas/solids contacting principles described in this disclosure and will include at least two elevations of jets directing a fluidizing gas directly into the bed.

A pilot reactor was designed for cold flow simulation of this invention. It was found that the large central jet 22 enhances the solid circulation and mixing inside the bed, and promotes a solid flow pattern conducive to agglomeration of impurities. The intensive solids mixing produced by the central jet 22 and the peripheral orifices 24 provides a more uniform temperature in the bed and improve production. In this test, the upper diameter of the bed was approximately 10 inches (25.4 centimeters) and narrowed at its conical lower

portion to 4 inches (10.2 centimeters). A 0.5 (1.27 centimeters) inch diameter graphite pipe was employed for the central jet 22 and the orifices in the distribution plate were located 2, 4 and 6 inches above the residue discharge conduit or collection tube 18 and were 0.0787 inches (2 millimeters) in diameter. The slope of the distribution plate 16 was approximately  $70^\circ$  to the horizontal. These relative dimensions can be employed to scale the design from a pilot model to a production reactor size. Accordingly, this invention enables a continuous reaction to be sustained within the fluidized bed without clogging of the bed and enables either continuous or on-line batch removal of the process residue.

While specific embodiments of the invention have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details could be developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only and not limiting as to the scope of invention which is to be given the full breadth of the claims appended and any and all equivalents thereof.

What is Claimed is:

1. A fluidized bed reactor (10) for mixing a plurality of materials and transforming a chemical property of the materials to establish a desired product comprising:
  - 5 a hollow, elongated, vertically oriented reactor housing (12) for confining the reaction of the materials as they are transformed;  
a central gas and/or solids inlet (22) proximate the bottom of a reaction zone within the housing (12) for directing gas parallel to the vertical axis of the housing to maintain the raw materials in suspension; and
  - 10 a plurality of peripheral gas inlet jets (24) positioned at least two elevations along the elongated dimension of the housing (12) for introducing gas at an angle to the elongated dimension of the housing to promote mixing of the entrained materials in suspension.
2. The fluidized bed reactor (10) of claim 1 wherein the  
15 reactor housing (12) has a conical section (16) in its reaction zone with the reduced diameter of the cone at its lower end interfacing with the central gas inlet (22).
3. The fluidized bed reactor (10) of claim 2 including a residue collection housing (18) mating at one end with the reduced diameter section (16) of the reactor housing and having an inclined lower wall (20) for directing residue  
20 from the reaction process to a residue collection port (32).
4. The fluidized bed reactor (10) of claim 3 including a feeder (34) positioned at the residue collection port (32) for removing the residue from the collection housing (18).
5. The fluidized bed reactor (10) of claim 4 wherein the feeder  
25 (34) is a screw or rotary feeder.
6. The fluidized bed reactor (10) of Claim 4 wherein the feeder (34) continuously removes the residue from the reactor during operation.
7. The fluidized bed reactor (10) of claim 3 including a sparger (30) surrounding at least a portion of the collection housing (18) for introducing

gas within the collection housing (18) to maintain residue below a given size in suspension and directed back into the reaction zone while enabling residue agglomerates above the given size to drop towards the collection port (32).

5           8.     The fluidized bed reactor (10) of claim 7 wherein the sparger (30) gas is introduced at a downwardly directed angle to the central axis of the collection housing (18).

10           9.     The fluidized bed reactor (10) of claim 3 wherein the incline of the lower wall (20) of the collection housing (18) is designed so that the gravitational forces on the residue above the given size will overcome the wall friction and travel to the collection port (32).

          10.    The fluidized bed reactor (10) of claim 1 wherein the peripheral gas jets (24) are directed at a downward angle to a line perpendicular to the central axis of the reactor housing (12).

15           11.    The fluidized bed reactor (10) of claim 1 wherein gas from the central gas inlet (22) is introduced into the reaction zone without passing through a solid or perforated diffuser section.

20           12.    The fluidized bed reactor (10) of claim 7 wherein approximately 30% of the fluidizing gas is introduced through the central gas inlet (22), approximately 65% of the fluidizing gas is introduced through the peripheral gas inlets (24), and 5% and the fluidizing gas is introduced through the sparger (30).

          13.    The fluidized bed reactor (10) of claim 1 including control valves (27) for individually controlling the quantity of gas passing through the respective peripheral jets (24).

25           14.    The fluidized bed reactor (10) of claim 1 wherein the peripheral gas jet (24) inlets includes a plurality of gas jets at each of said elevations respectively positioned around the circumference of the reactor housing (12).

15. The fluidized bed reactor (10) of claim 14 wherein the peripheral gas jets (24) at each elevation are equidistantly positioned around the circumference of the reactor housing (12).

5 16. The fluidized bed reactor (10) of claim 14 wherein the peripheral gas jets (24) at each elevation are not aligned with the jets (24) at the other elevations.

17. The fluidized bed reactor (10) of claim 4 wherein the feeder (34) removes the residue from the reactor in batches during operation.

10 18. The fluidized bed reactor (10) of claim 1 wherein the peripheral gas jets (24) are positioned at at least three elevations.

19. The fluidized bed reactor (10) of claim 1 wherein the pressure drop across the peripheral gas jets (24) is at least thirty percent of the pressure drop across the reaction zone.

15 20. The fluidized bed reactor (10) of claim 7 wherein the pressure drop across the sparger (30) is at least thirty percent of the pressure drop across the reaction zone.


20

25

ABSTRACT OF THE DISCLOSURE

A fluidized bed reactor (10) for chemically transforming reactants to generate a desired product, having a hollow, elongated, vertically oriented reactor housing (12) for confining the reaction and an unobstructed collection path (18) below the reaction zone for funneling the residue of the process to an exit port (32). A central gas inlet (22) proximate the bottom of the reaction zone within the housing directs gas parallel to the vertical axis of the housing to maintain the raw materials in suspension. A plurality of individually controlled peripheral gas jets (24) positioned at least two elevations along the elongated dimension of the reaction housing (12), and located circumferentially around the housing (12) at each elevation, introduce gas at an angle to promote mixing of the entrained materials in suspension. The clog-free collection path (18) below the reaction zone funnels the residue of the process to an exit port (32) where it is continuously removed by a screw feeder (34). A gas sparger (30) below the reaction zone diverts fine agglomerates of the residue back into the reaction stream to increase the efficiency of the process and minimize the residue.

1/1

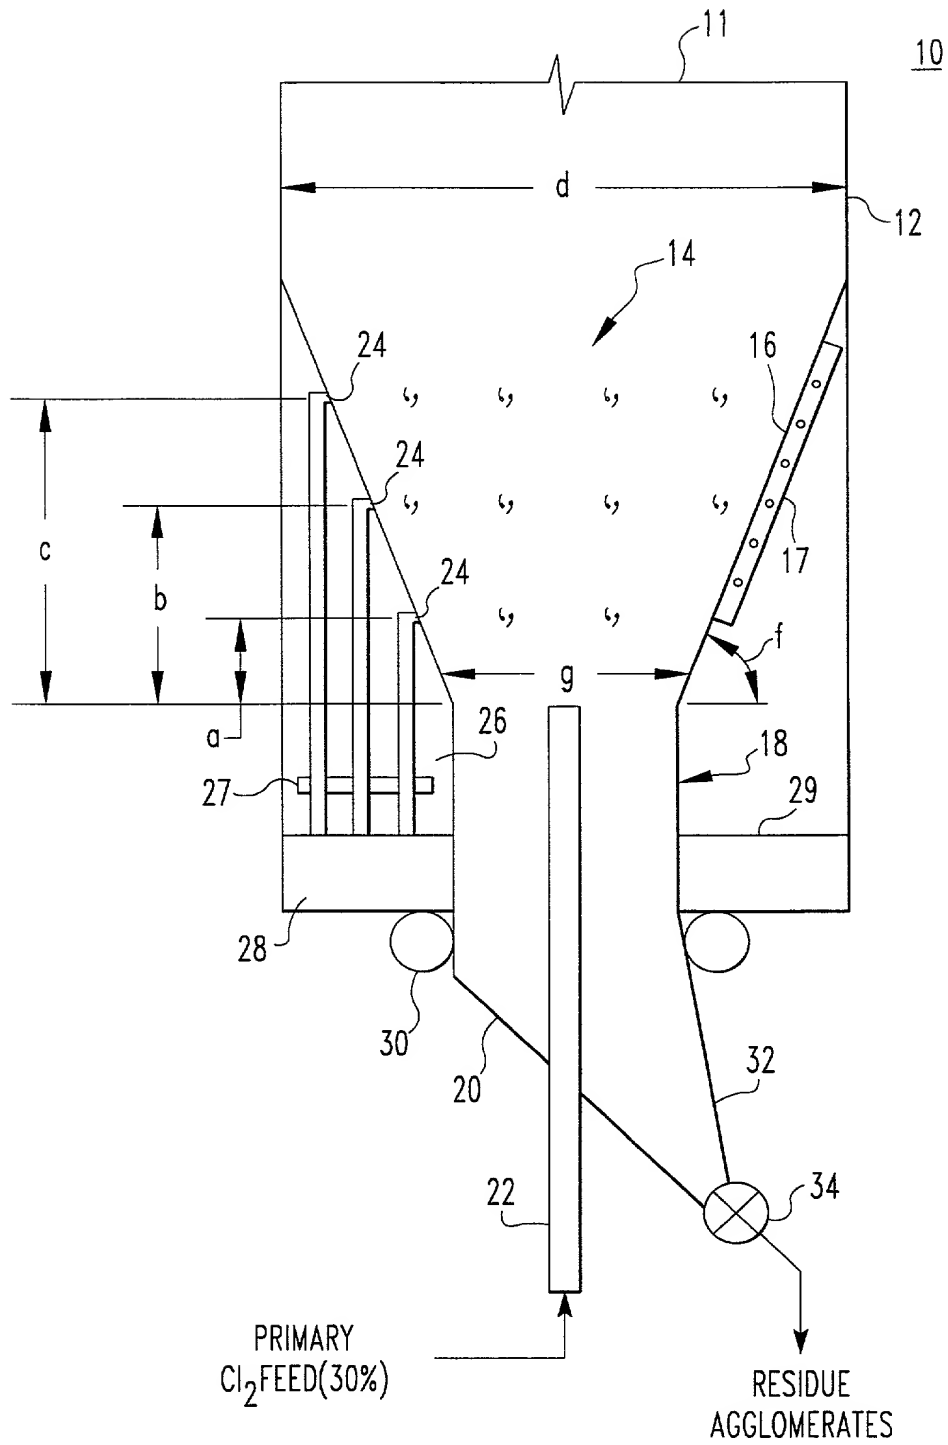

As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **IMPROVED FLUIDIZED BED REACTOR DESIGN** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

J.C. SPADACENE (27,239)  
J.C. VALENTINE (27,239)

SEND CORRESPONDENCE TO: WESTINGHOUSE ELECTRIC COMPANY LLC  
LAW DEPARTMENT  
P.O. Box 350  
Pittsburgh, PA 15230-0355

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: WEN-CHING YANG

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 236 Mount Vernon Ave.                      Citizenship: USA  
Export, PA 15235

County:  
Post Office Address: 236 Mount Vernon Ave.  
Export, PA 15235

Full name second inventor: DAVID F. MCLAUGHLIN

Inventor's signature David F. McLaughlin Date Feb. 07, 2000

Residence: 1537 Oak Street                      Citizenship: USA  
Oakmont, PA 15139

County:  
Post Office Address: 1537 Oak Street  
Oakmont PA 15139

Full name third inventor: TIMOTHY L. FRANCIS

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 2679 Fillmore Ave.                      Citizenship: USA  
Ogden, UT 84402

County:  
Post Office Address: 2679 Fillmore Ave.  
Ogden, UT 84402

As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **IMPROVED FLUIDIZED BED REACTOR DESIGN** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

J.C. SPADACENE (27,239)  
J.C. VALENTINE (27,239)

SEND CORRESPONDENCE TO: WESTINGHOUSE ELECTRIC COMPANY LLC  
LAW DEPARTMENT  
P.O. Box 350  
Pittsburgh, PA 15230-0355

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: WEN-CHING YANG

Inventor's signature Wen-Ching Yang Date 1/11/2000  
Residence: <sup>2376</sup>~~236~~ Mount Vernon Ave. Export, PA ~~15235~~ **15632** Citizenship: USA  
County: Westmoreland  
Post Office Address: 236 Mount Vernon Ave.  
Export, PA 15235

Full name second inventor: DAVID F. MCLAUGHLIN

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence: 1537 Oak Street Oakmont, PA 15139 Citizenship: USA  
County:  
Post Office Address: 1537 Oak Street  
Oakmont PA 15139

Full name third inventor: TIMOTHY L. FRANCIS

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence: 2679 Fillmore Ave. Ogden, UT 84402 Citizenship: USA  
County:  
Post Office Address: 2679 Fillmore Ave.  
Ogden, UT 84402

As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **IMPROVED FLUIDIZED BED REACTOR DESIGN** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

J.C. SPADACENE (27,239)  
J.C. VALENTINE (27,239)

SEND CORRESPONDENCE TO: WESTINGHOUSE ELECTRIC COMPANY LLC  
LAW DEPARTMENT  
P.O. Box 350  
Pittsburgh, PA 15230-0355

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: WEN-CHING YANG

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 236 Mount Vernon Ave.                      Citizenship: USA  
Export, PA 15235

County:  
Post Office Address: 236 Mount Vernon Ave.  
Export, PA 15235

Full name second inventor: DAVID F. MCLAUGHLIN

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 1537 Oak Street                      Citizenship: USA  
Oakmont, PA 15139

County:  
Post Office Address: 1537 Oak Street  
Oakmont PA 15139

Full name third inventor: TIMOTHY L. FRANCIS

Inventor's signature Timothy L. Francis Date January 11, 2000

Residence: 2679 Fillmore Ave.                      Citizenship: USA  
Ogden, UT 84402

County: Weber  
Post Office Address: 2679 Fillmore Ave.  
Ogden, UT 84402